




# Canon PowerShot SD500 Digital ELPH Shutter Button Replacement

This guide will show you how to disassemble your Powershot SD500 Digital ELPH and install a new shutter button.

Written By: Taylor Shields

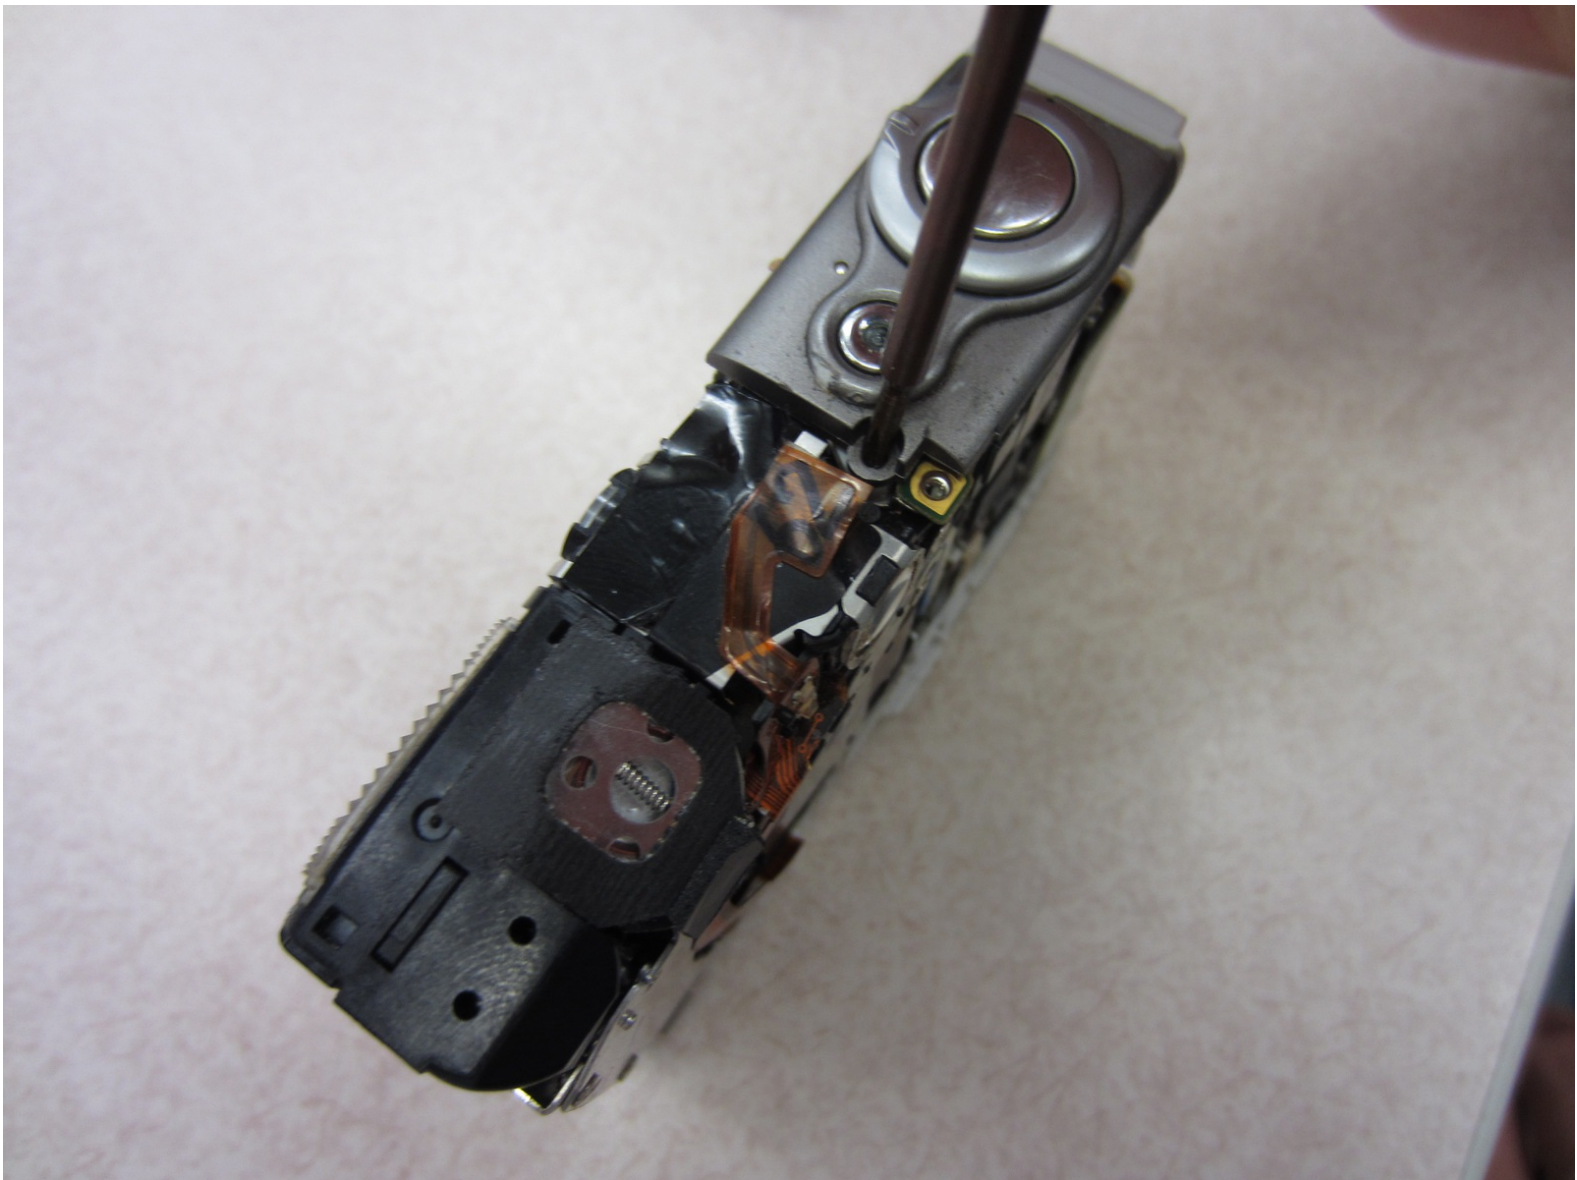

## INTRODUCTION

The shutter button is one of the most commonly used buttons on a camera. Therefore, it is also the most likely to break.


---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery

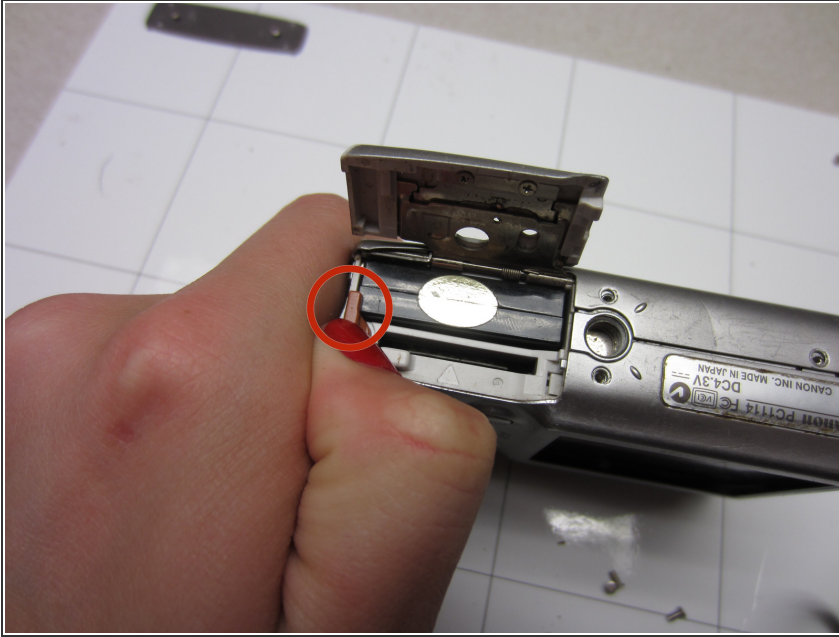

- Slide open the battery cover.
- Push the small orange tab to the side so the battery can be removed.

## Step 2



- Slide the battery out of the battery compartment.


### Step 3 — Front and Rear Casing



- Two Phillips screws need to be removed using a #00 Phillips screwdriver. The upper screw is under the USB port cover, which can simply be pulled away gently from the casing. the lower screw is visible on the panel.
  - The screws are different sizes. The .125 inch screw is located under the USB port cover. The 0.85 inch screw goes in the lower hole on the panel.
- i** When looking at the back of the camera, these two screws are on the right panel of the camera.




## Step 4

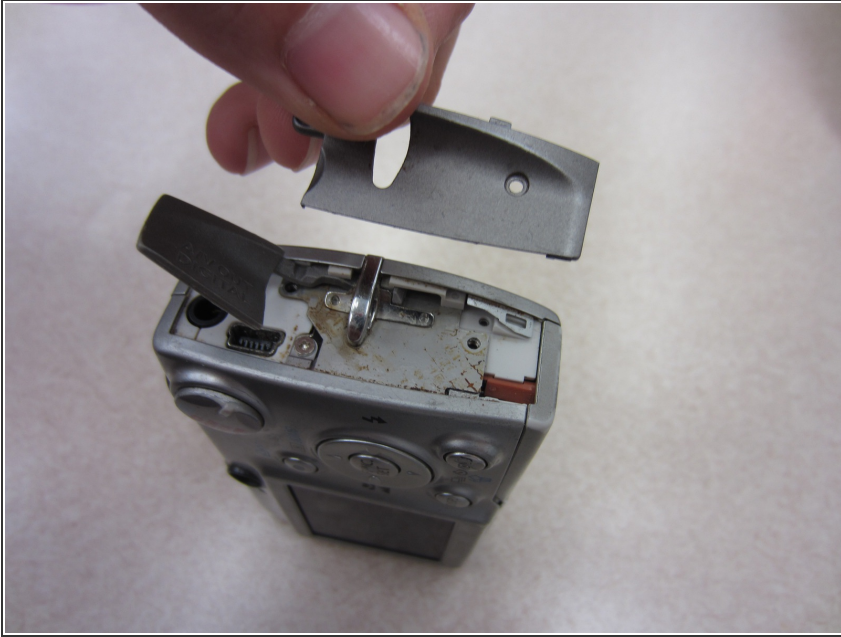

- Remove the right side cover from the camera casing.

## Step 5

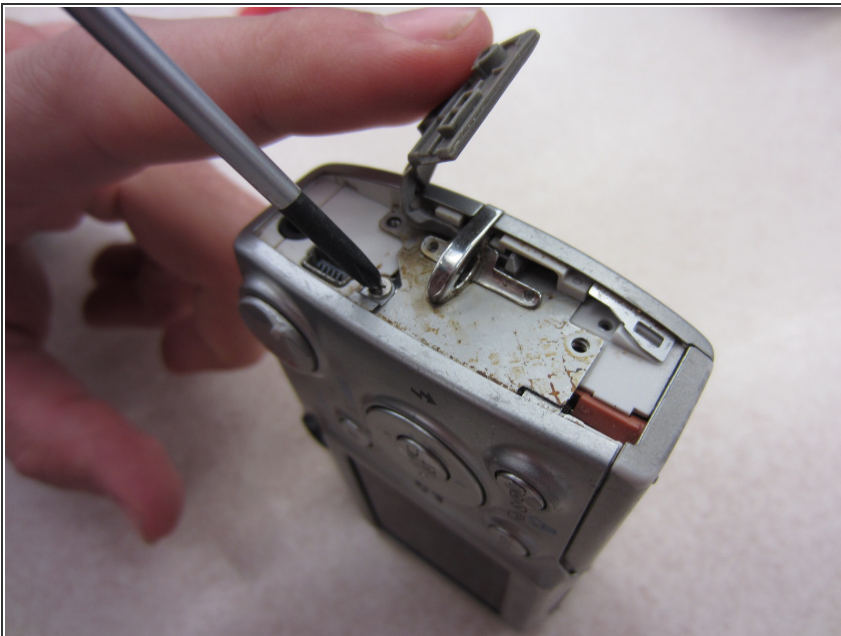

- Remove a .07 inch Phillips screw using a #00 Phillips screwdriver.

## Step 6



- Remove two .085 inch Phillips screws from the left side of the camera using a #00 Philips screwdriver.

## Step 7



- Remove the left side cover from the camera.



## Step 8




- Remove three .15 inch Phillips screws from the bottom of the camera using a #00 Phillips screwdriver.

## Step 9




- Once the casing is unscrewed, hold the camera with one side facing down, and lift the opposite face of the casing to open it.
- Remove the internal camera components and layout out all pieces on a clean surface.
- ⓘ The front and back cover may require gentle rocking to remove.

## Step 10 — Shutter Button

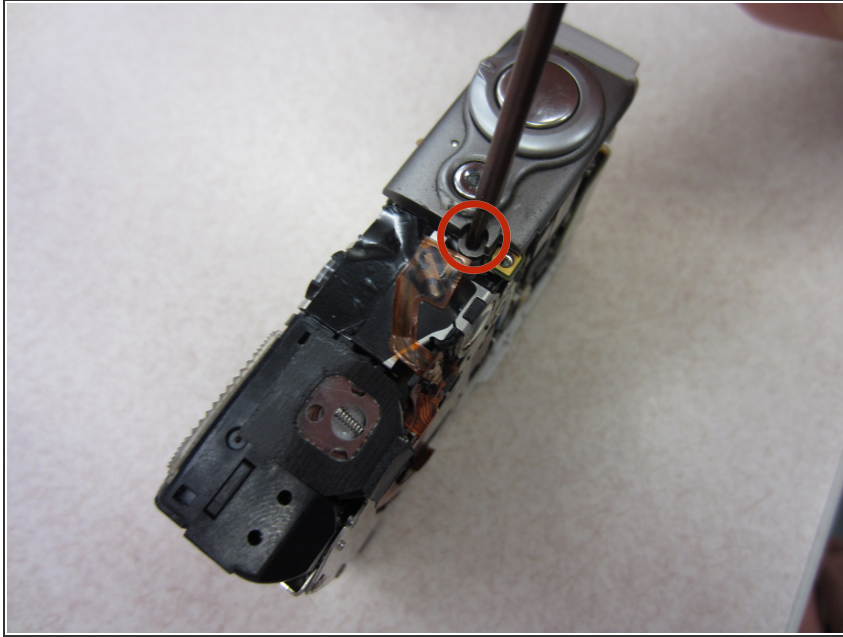

- Unscrew one .235 inch long Phillips screw using a #00 Phillips screwdriver from the top of the camera.

## Step 11

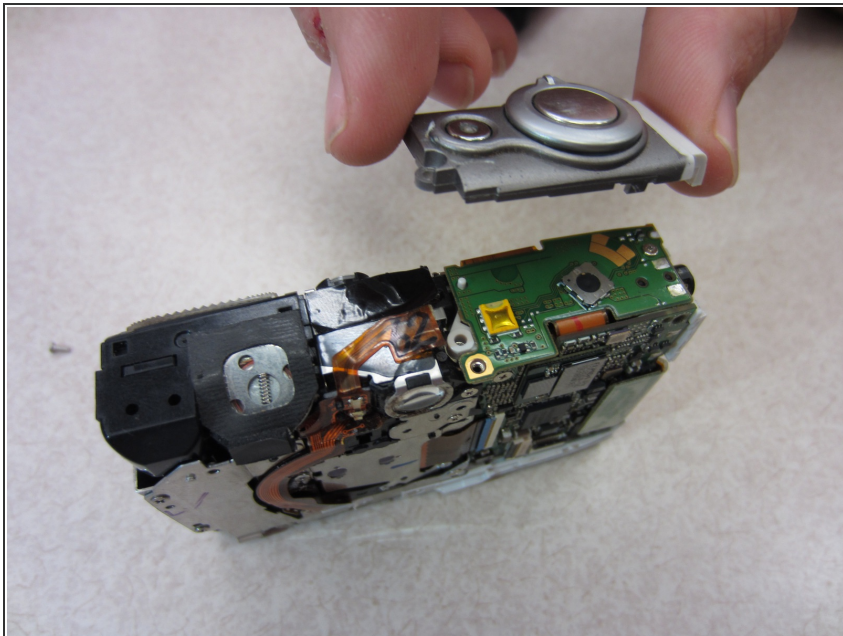

- Gently remove the shutter button unit from the rest of the camera.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 06:43:50 AM.